CHAPTER 18 ENVIRONMENTAL REVIEW: MANHATTAN CURBSIDE RECYCLABLES TO GANSEVOORT RECYCLABLES ACCEPTANCE FACILITY

18.1 Introduction

The NYCEDC is in the planning stages for the Gansevoort Recyclables Acceptance Facility. Once a design is developed, the Gansevoort Recyclables Acceptance Facility will be the subject of a future environmental review. The environmental review of this Alternative in this <u>F</u>DEIS is limited to off-site impacts associated with traffic, air quality and noise.

The results of the environmental analyses of the Gansevoort Recyclables Acceptance Facility are presented in the following sections:

- 18.2 Land Use, Zoning, and Public Policy
- 18.3 Socioeconomic Conditions
- 18.4 Community Facilities and Services
- 18.5 Open Space
- 18.6 Cultural Resources
- 18.7 Urban Design, Visual Resources, and Shadows
- 18.8 Neighborhood Character
- 18.9 Natural Resources
- 18.10 Hazardous Materials
- 18.11 Water Quality
- 18.12 Waterfront Revitalization Program
- 18.13 Infrastructure, Solid Waste and Sanitation Services, and Energy
- 18.14 Traffic, Parking, Transit, and Pedestrians
- 18.15 Air Quality
- 18.16 Odor
- 18.17 Noise

Section 2.3.2 provides a summary description of the site and important characteristics of the facility design. A detailed discussion of the methodologies that were applied in conducting each analysis is provided in Chapter 3. Supplemental information on the site or the study area is provided in the following sections when appropriate to the analysis.

18.2 Land Use, Zoning, and Public Policy

See Section 18.1 for a description of the analysis required.

18.3 Socioeconomic Conditions

See Section 18.1 for a description of the analysis required.

18.4 Community Facilities and Services

See Section 18.1 for a description of the analysis required.

18.5 Open Space

See Section 18.1 for a description of the analysis required.

18.6 Cultural Resources

See Section 18.1 for a description of the analysis required.

18.7 Urban Design, Visual Resources, and Shadows

See Section 18.1 for a description of the analysis required.

Ę

18.8 Neighborhood Character

See Section 18.1 for a description of the analysis required.

18.9 Natural Resources

See Section 18.1 for a description of the analysis required.

18.10 Hazardous Materials

See Section 18.1 for a description of the analysis required.

18.11 Water Quality

See Section 18.1 for a description of the analysis required.

18.12 Waterfront Revitalization Program

See Section 18.1 for a description of the analysis required.

18.13 Infrastructure, Solid Waste and Sanitation Services, and Energy

See Section 18.1 for a description of the analysis required.

18.14 Traffic, Parking, Transit, and Pedestrians

18.14.1 Introduction

The Gansevoort Recyclables Acceptance Facility would receive MCR delivered in DSNY collection vehicles. Therefore, pursuant to CEQR guidelines, a traffic analysis was performed on

the projected net increase in collection vehicles in the study area (which is defined below) and on other site-generated traffic. (See Section 3.16 for a discussion of CEQR analysis thresholds.)

18.14.2 Existing Conditions

The former Gansevoort Street MTS was used as an MTS, but has been closed since July 1991.

18.14.3 Future No-Build Conditions


The NYCEDC is currently in the planning stages for converting the Gansevoort property into parkland with recreational activities. Because analysis of traffic impacts was not required for the Gansevoort Recyclables Acceptance Facility, as discussed in Section 18.14.4, Future No-Build Conditions were not estimated.


18.14.4 Potential Impacts with MCR to the Gansevoort Recyclables Acceptance Facility

The Gansevoort Recyclables Acceptance Facility would receive MCR from Manhattan CDs 1 through 12. The assumed 24-hour truck distribution for the Gansevoort Recyclables Acceptance Facility is depicted in Figure 18.14-1. The assumed DSNY recycling collection vehicle routes are depicted in Figure 18.14-2. Peak hour traffic generation for this facility is expected to be 32 PCEs (including employee vehicles), which falls below the CEQR screening threshold of 50 trip ends per hour. (See Table 3.16-2 in Section 3.16 for a listing of peak hour trip ends by facility). Therefore, no additional traffic analysis is required at this site.


Figure 18.14-1 Truck Trips per Hour Gansevoort Recyclables Acceptance Facility

ġ.

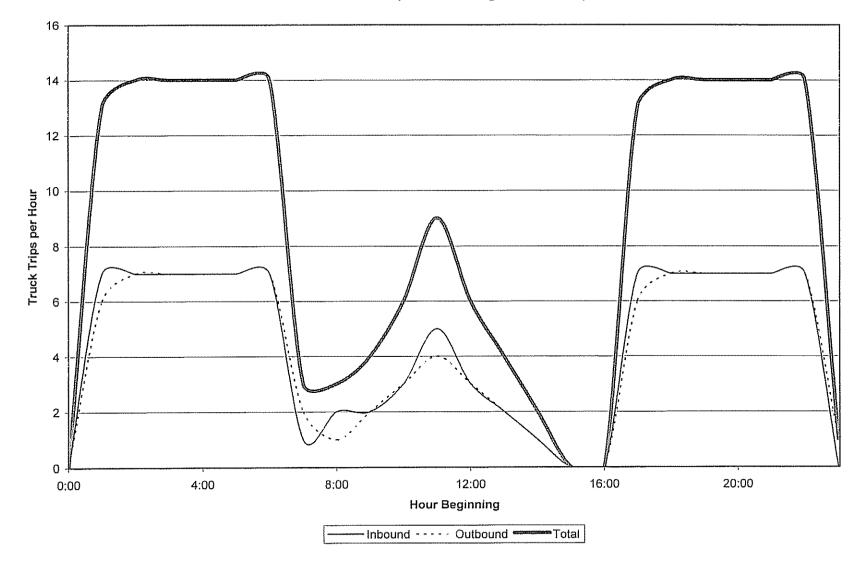

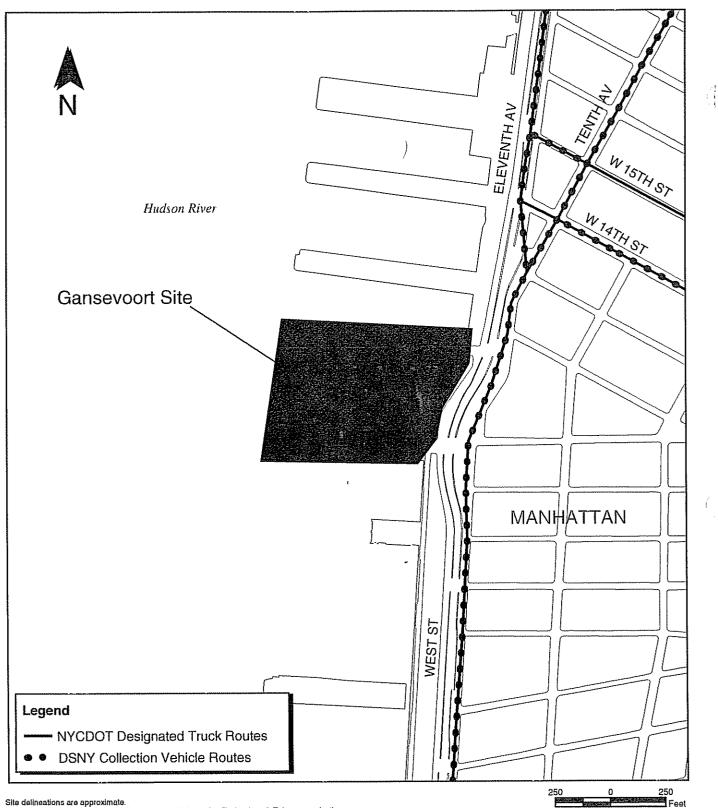

Site delineations are approximate. Base Map Source: New York City Department of Information Technology & Telecommunications



18.15 Air Quality

See Section 18.1 for a description of the on-site analysis required.

18.15.1 Definition of Study Area

The study area for the off-site air quality analysis consists of the intersection of Route 9A and West 14th Street, as listed in Section 18.15.4.2.

18.15.2 Existing Conditions

Applicable air quality data collected at the monitoring station(s) nearest to the study area are shown in Table 18.15.1. These data were compiled by NYSDEC for the latest calendar year for which applicable data are currently available. The monitored levels do not exceed national and state ambient air quality standards.

Table 18.15-1
Representative Ambient Air Quality Data
Gansevoort Recyclables Acceptance Facility

Pollutant	Monitor	Averaging Time	Value	NAAQS
СО	225 East 34 th Street between	8-Hour	3.0 ppm	9 ppm
	Second and Third Avenues	1-Hour	4.0 ppm	35 ppm
NO ₂	P.S. 59 (288 East 57 th Street)	Annual	0.038 ppm	0.05 ppm
PM ₁₀	1 Pace Plaza	Annual	27 μg/m ³	50 μg/m ³
	I Face Flaza	24-Hour	80 μg/m ³	150 μg/m ³
SO ₂	P.S. 59 (288 East 57 th Street)	3-Hour	0.071 ppm	0.5 ppm
		24-Hour	0.047 ppm	0.14 ppm
		Annual	0.014 ppm	0.03 ppm

Notes:

Source: USEPA Airdata/NYCDEP, April 2003

18.15.3 Future No-Build Conditions

The primarily commercial/industrial nature of the study area is not expected to change by the 2006 analysis year. As such, no significant changes to air quality levels are anticipated, and Future No-Build Conditions are expected to be the same as Existing Conditions for all pollutants except CO. CO concentrations are expected to be reduced by increasingly stringent, federally-mandated vehicular emission controls, although any effects may be offset by increases in regional traffic volumes.


18.15.4 Potential Off-Site Air Quality Impacts with MCR to the Gansevoort Recyclables Acceptance Facility

18.15.4.1 Pollutants Considered and Analyses Conducted

Using 2001 CEQR Technical Manual guidelines for the selection of analysis locations, one intersection was identified as potentially having significant impacts by the proposed collection vehicles: the intersection of Route 9A and West 14th Street. Detailed mobile source analyses were then conducted at this location during the applicable (i.e., worst-case) time periods to determine whether the facility-generated traffic has the potential to cause exceedances of the PM₁₀, NAAQS, or NYCDEP's <u>and</u>or NYSDEC's 24-hour and annual PM_{2.5} STVs. No CO analysis was conducted because the number of proposed vehicle trips to and from the facility is below CEQR CO screening thresholds. Figure 18.15-1 shows the location of the intersection analyzed.

18.15.4.2.2 Results of the Off-Site Analysis

Maximum PM_{10} concentrations and $PM_{2.5}$ project-related impacts estimated near the intersection of Route 9A and West 14th Street are provided in Table 18.15-2. These results show that all estimated concentrations are within (less than) the applicable state and federal ambient air quality standards and/or STVs for $PM_{2.5}$. As such, proposed recycling operations at this facility would not result in significant off-site air quality impacts.

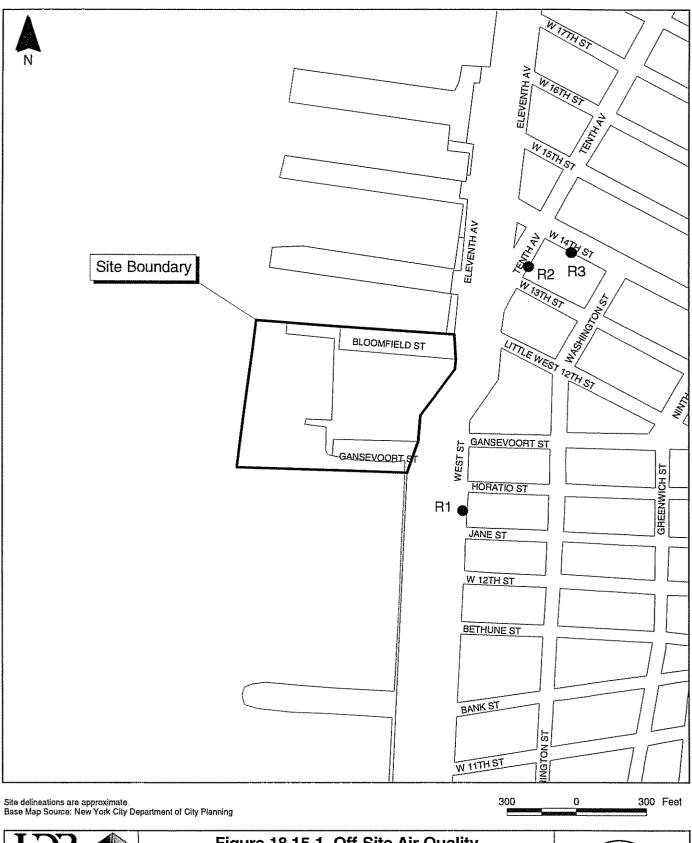



1

Table 18.15-2Maximum Estimated Pollutant Concentrations Near Selected Roadway IntersectionsGansevoort Recyclables Acceptance Facility

	PN	1 ₁₀	PM _{2:5} ⁽²⁾		
Air Quality Receptor Site	24-hr PM ₁₀ Concentrations ⁽¹⁾ μg/m ³ (NAAQS: 150 μg/m ³)	Annual PM ₁₀ Concentrations ⁽¹⁾ μg/m ³ (NAAQS: 50 μg/m ³)	Impacts from Off-Site Emission Sources ⁽²³⁾ μg/m ³ (24 Hour STV: 5 μg/m ³)	Impacts from Off-Site Emission Sources ⁽³⁾ µg/m ³ (Annual Neighborhood Average STV: 0.1 µg/m ³)	
Route 9A & West 14th Street					
Existing Conditions	110.8<u>121</u>	4 9.5<u>43</u>			
Future No-Build Conditions	111.4<u>121</u>	4 <u>9.743</u>			
Future Build Conditions	111.6<u>122</u>	4 <u>9.943</u>			
Future Build Incremental			0.07 <u>0.1</u>	0.01 <u>0</u>	

Notes:

⁽¹⁾ PM_{10} concentrations are the maximum concentrations estimated using the AM, Facility, and PM peak traffic conditions plus background concentration; 24-hr $PM_{10} = \underline{6188} \ \mu g/m^3$; Annual $PM_{10} = \underline{2134} \ \mu g/m^3$).

(2) The PM_{2.5} concentrations are the maximum modeled incremental PM_{2.5} impacts (due to project induced [or Future Build] traffic only) estimated by taking <u>T</u>the difference between the maximum PM_{2.5} concentrations <u>underfor the</u> Future No-Build and Future Build <u>conditions</u>scenarios at any maximum slope walk receptors. three meters from the edge of the roadways <u>under using</u> AM, Facility, or PM peak traffic conditions.

(3) The PM_{2.5}-concentrations are the maximum modeled incremental PM_{2.5}-impacts (due to project induced [or Future Build] traffic only) estimated by taking I the difference between the maximum PM_{2.5} concentrations <u>underfor the f</u>Future No-Build and fFuture Build scenarios at <u>maximumany</u> receptors 15 meters from the edge of the roadways using AM, Facility, or PM peak traffic conditions.

ppm = parts per million

 $\mu g/m^3 = microgram per cubic meter$

í

18.16 Odor

See Section 18.1 for a description of the on-site analysis required.

18.17 Noise

See Section 18.1 for a description of the on-site analysis required.

The noise analysis addresses off-site sources of noise emission from the Gansevoort Recyclables Acceptance Facility-related solid waste management activities. It is based on Section R of the 2001 CEQR Technical Manual for off-site sources. Section 3.19 provides a general discussion of the relevant regulatory standards and methodologies applied in this analysis.

18.17.1 Existing Conditions

18.17.1.1 Off-Site Noise Levels

Existing off-site noise levels consist of the noise from existing traffic and other background noise. A screening analysis was conducted to determine if off-site noise monitoring would be required along the Gansevoort Recyclables Acceptance Facility-related truck routes due to an increase in traffic caused by DSNY and other agency collection vehicles. As a result of this screening, which is described in Section 3.19.5.2, an off-site noise analysis was not required; therefore, off-site noise monitoring was not conducted.

18.17.2 Future No-Build Conditions

18.17.2.1 Off-Site Noise Levels

Off-site noise levels for the Future No-Build Conditions in 2006 were calculated using the annual growth rates for traffic volume provided in Section O: Traffic of the 2001 CEQR Technical Manual. Table 18.17-1 presents the existing traffic volume and the Future No-Build traffic volume for the hour expected to receive the largest change in noise levels (when the difference between the traffic noise levels and background noise levels is greatest) based on the first-level screening.

Table 18.17-1 Off-Site Noise Traffic Volume Gansevoort Recyclables Acceptance Facility

Location	Hour	Existing Traffic Volume ⁽¹⁾ (Vehicles/Hour)	Future No-Build Traffic Volume ⁽²⁾ (Vehicles/Hour)
Route 9A between Horatio and Jane Streets	3:00 a.m.	751	763
Route 9A Between West 13 th and West 14 th Streets	3:00 a.m.	751	763
West 14 th Street Between Washington Street and Route 9A	4:00 a.m.	335<u>336</u>	341

Notes:

(1) Existing Traffic Volumes are based on ATR data

⁽²⁾ Future No-Build Traffic Volumes are based on CEQR annual traffic growth rates.

18.17.3 Potential Impacts with MCR to the Gansevoort Recyclables Acceptance Facility

18.17.3.1 Off-Site Noise Levels

A screening analysis was conducted to determine if a detailed off-site noise analysis including noise monitoring would be required along the truck routes serving the Gansevoort Recyclables Acceptance Facility. The assumed DSNY and other agency collection vehicle routes are provided in Section 14 of this chapter. As a result of this screening, which is described in Section 3.19.5.2, an off-site noise analysis and off-site noise monitoring was not required. Results of the screening for the hour expected to receive the largest change in noise levels (when the difference between the traffic noise levels and background noise levels is greatest) are provided in Table 18.17-2.

18.17.3.2 Combined On-Site and Off-Site Noise Levels

An off-site noise screening analysis was performed for the Gansevoort Recyclables Acceptance Facility. An on-site noise analysis was not required; therefore, a combined noise analysis was not performed.

Table 18.17-2Off-Site Noise Screening ResultsGansevoort Recyclables Acceptance Facility

		Future No-Build	Collection	Employee	Total Net DSNY Collection Vehicle	Future Build PCEs ⁽¹⁾⁽²⁾	Possible
Location Route 9A between	Hour	PCEs ⁽¹⁾	Vehicles	Vehicles	PCEs ⁽¹⁾		Impact ⁽³⁾
Horatio and Jane Streets	3:00 a.m.	1159	14	0	658	1817	No
Route 9A Between West 13 th and West 14 th Streets	3:00 a.m.	1159	7	0	329	1488	No
West 14 th Street Between Washington Street and Route 9A	4:00 a.m.	932	7	0	329	1261	No

Notes:

⁽¹⁾ Total PCEs are rounded to the nearest whole number.

(2) Future Build PCEs include DSNY collection vehicles delivering MCR and employee vehicles. Per CEQR, collection vehicles are converted to PCEs using a factor of 47, and employee vehicles are converted to PCEs using a factor of 1.

(3) There is a possible impact if the Future Build PCEs are double the Future No-Build PCEs or more.